


鑽孔攻牙雙用機 DRILLING & TAPPING MACHINES


規格 : Technical Data

機型Item Number			LSY-16T					SY-25T						
鑽孔能力	Drilling Capacity	m/m	鑄鐵 Castiron		φ 20	鋼 Steel		φ 18	鑄鐵 Castiron		φ 32	鋼 Steel		φ 28
攻牙能力	Tapping Capacity	m/m	鑄鐵 Castiron		φ 18	鋼 Steel		φ 14	鑄鐵 Castiron		φ 32 (強力型 φ 38)	鋼 Steel		φ 28
主軸行程	Splndle Stroke	m/m	100					130						
旋 距	Swing	m/m	396					445						
主軸斜度	Taper of Spindle		MT # 3					MT # 3 (MT # 4 Special)						
新型遊星齒輪減速八段變速裝置 主軸回轉速 Spindle Speeds r.p.m. 8-step variable speed of new type			4P	50Hz	2100	1410	855	580	6P	50Hz	1050	692	458	275
					605	400	245	165			304	200	133	80
				60Hz	2525	1695	1025	700		60Hz	1260	830	550	330
					725	485	295	200			360	240	160	96
使用馬達	Motor Rating		3 φ *0.55KW(3/4HP)*4P					3 φ *0.75KW (1HP)*6P 3 φ * 1.5 KW (2HP)*6P						
重量 (約)	Weight (approx)	kgw	100					175						

外形尺寸 Principal Dimensions

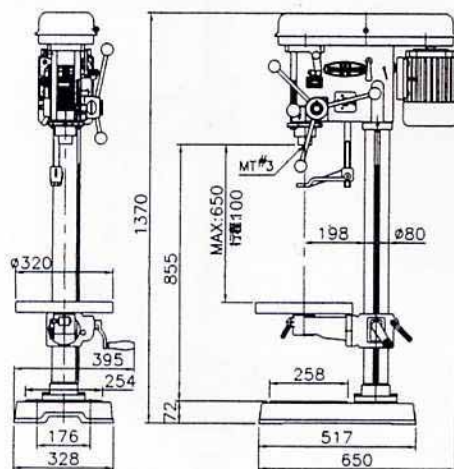

LSY-16T (齒輪浸潤式)

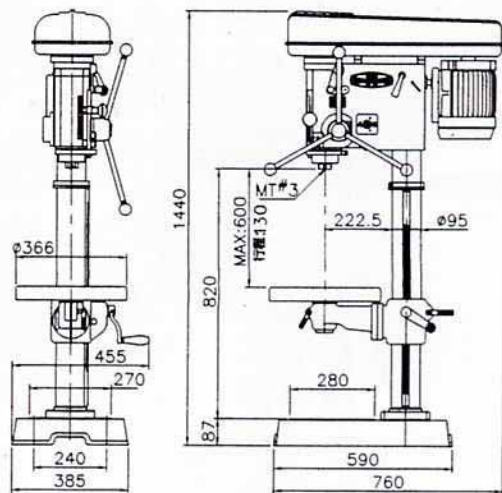

SY-25T